

Real 2400W RMS power capacity (8 hours pink noise)

Clean and deep reproduction

Premium custom made European Drivers

Heavy braced, vibration free birch plywood cabinet


Touring grade soft touch gloss-free black paint finish

Applications

CSW218V subwoofer is suitable for bass reinforcement for main PA systems, touring or permanent installations for small to large stages, indoor or outdoor live performances.

Suitable for:

**Stadium and arena / Multi-functional room/
Auditorium and Theater / Nightclub / Bar/
High-end Karaoke room**

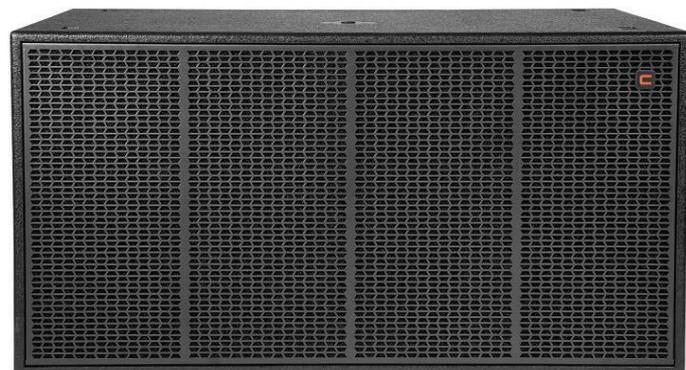

Specifications

Power Handling (AES standard)	2400W RMS / 4800W Program / 9600W Peak
Nominal impedance	4 ohms
Frequency response (-6dB no preset)	34~1500Hz
Average sensitivity	100dB / W / m (40~150Hz)
Maximum SPL (Calculated)	133dB continuous / 136dB Program / 139dB Peak
Nominal Directivity (-6dB)	Omni in usable range
Low Frequency Driver	18" CELTO ACOUSTIQUE 18SW1202-8 (2pcs)
Woofer Chassis	Die cast Aluminium
Woofer Voice coil diameter	4"/100 mm long throw
Crossover	No, only use in active mode with external electronic crossover
Flying hardware	No
Connectors	Genuine NEUTRIK 2pcs SpeakON NL4MP (1+/1- Input and Link, 2+/2- Link)
Mounting hardware	2pcs M20 thread socket
Cabinet	Exterior grade Birch Plywood Heavily braced with Tongue & Groove
Finish	Textured Waterbrone Black coating Acoustic PU foam behind Front grill
Size (WxHxD)	1100x580x740 mm net, 1200x680x840 mm gross
Weight	76Kg net, 87Kg gross